

# Advances in silicon nanophotonics

Jørn M. Hvam\* and Minhao Pu

DTU Fotonik, Department of Photonics Engineering, Technical University of Denmark  
Oersteds Plads 343, DK-2800 Kgs. Lyngby, Denmark  
\*e-mail: jmhv@fotonik.dtu.dk

Silicon has long been established as an ideal material for passive integrated optical circuitry due to its high refractive index, with corresponding strong optical confinement ability, and its low-cost CMOS-compatible manufacturability. However, the inversion symmetry of the silicon crystal lattice has been an obstacle for a simple realization of electro-optic modulators, and its indirect band gap has prevented the realization of efficient silicon light emitting diodes and lasers. Still, significant progress has been made in the past few years.<sup>1</sup> Electro-optic modulators based on the free carrier plasma effect have been tested up to 40 Gbit/s,<sup>2</sup> and hybrid evanescent silicon lasers have been realized both in the form of distributed feed-back lasers<sup>3</sup> and micro-disk lasers.<sup>4</sup> For enhancing the impact of silicon photonics in future ultrafast and energy-efficient all-optical signal processing, e.g. in high-bit-rate optical communication circuits and networks, it is vital that the nonlinear optical effects of silicon are being strongly enhanced.<sup>5</sup> This can among others be achieved in photonic-crystal slow-light waveguides<sup>6</sup> and in nano-engineered photonic-wires<sup>7</sup> (Fig. 1). In this talk I shall present some recent advances in this direction. The efficient coupling of light between optical fibers and the planar silicon devices and circuits is of crucial importance. Both end-coupling<sup>8</sup> (Fig. 1) and grating-coupling<sup>9</sup> solutions will be discussed along with polarization issues<sup>10</sup>. A new scheme for a hybrid III-V/silicon laser will also be discussed briefly.<sup>11</sup>

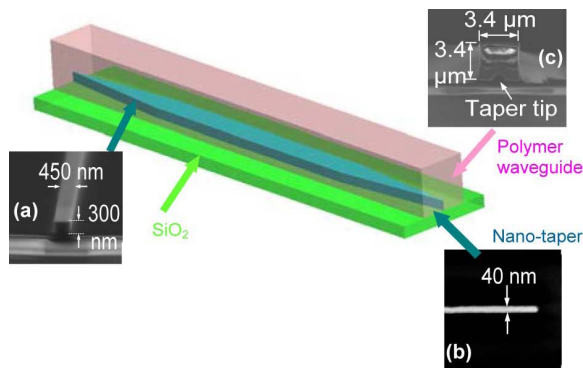


Fig.1. Schematic drawing of a nano-engineered silicon waveguide with SEM pictures of (a) cross section of the silicon waveguide, (b) top view of the silicon nano-taper tip, and (c) cross-section view of the nano-taper coupler with cladding polymer waveguide.

## References

- 1) See e.g. Nature Photonics (Focus Issue) **4**, 491-578 (2010).
- 2) L.Liao, A. Liu, d.Rubin, J. Basak, Y. Chetrit, H. Nguyen, R. Cohen, N. Izhaky, and M. Paniccia, Electron. Lett **43**, 1196 (2007).
- 3) A.W. Fang, E. Lively, Y.H. Kuo, D. Liang, and J.E. Bowers, Opt. Express **16**, 4413 (2008).
- 4) J. Van Campenhout, P. Rojo-Romeo, P. Regreny, C. Seassal, D. Van Thourhout, S. Verstyuyft, L. Di Cioccio, J.-M. Fedeli, C. Lagahe, and R. Baets, Opt. Express **15**, 6744 (2007).
- 5) L.K. Oxenløwe, M. Galili, M. Pu, H. Ji, H. Hu, K. Yvind, J.M. Hvam, H.C.H. Mulvad, E. Palushani, J.L. Areal, A.T. Clausen, and P. Jeppesen, IEEE J. Sel. Topics in Quantum Electron. **17**, issue 6 (2011).
- 6) J. Li, L. O'Faolain, I.H. Rey, and T.F. Krauss, Opt. Express **19**, 4458 (2011).
- 7) H. Ji, M. Pu, H. Hu, M. Galili, L.K. Oxenløwe, K. Yvind, J.M. Hvam, and P. Jeppesen, IEEE J. Lightwave Technol. **29**, 426 (2011).
- 8) M. Pu, L. Liu, H. Ou, K. Yvind, and J.M. Hvam, Optics Commun. **283**, 3678 (2010).
- 9) L. Liu, M. Pu, K. Yvind, and J.M. Hvam, Appl. Phys Lett. **96**, 051126 (2010).
- 10) L. Liu, Y. Ding, K. Yvind, and J.M. Hvam, Opt. Express **19**, 12646 (2011).
- 11) I.-S. Chung and J. Mørk, Appl. Phys. Lett. **97**, 151113 (2010).